
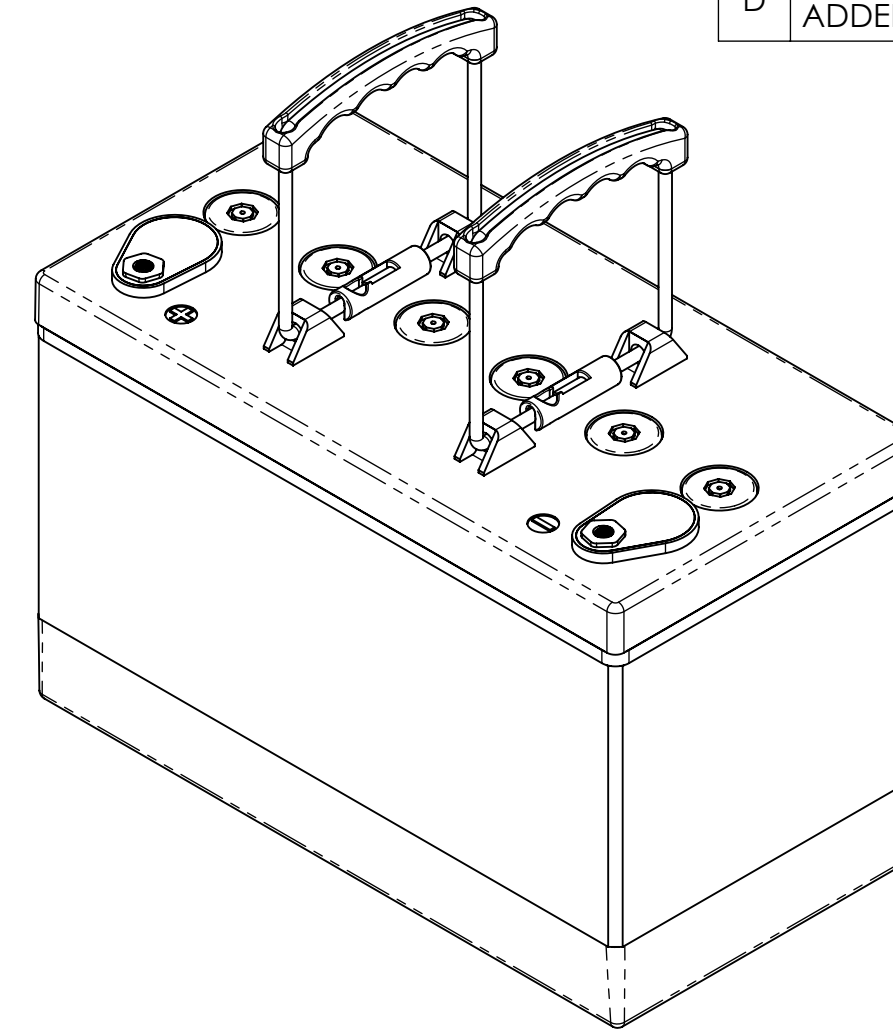




NOTES: UNLESS OTHERWISE SPECIFIED

1. SEE DRAWING NO. CB-00290 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
2. ALL TESTING IS PERFORMED IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
3. DIMENSIONS ARE INCH [MILLIMETER].
4. ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).
5. TERMINAL HARDWARE KIT PROVIDED, PART NUMBER 6923.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
C	REDESIGNED COVER	12/18/17	PH
D	STANDARDIZED ENVELOPE, ADDED NOTE 5	7/28/20	PH

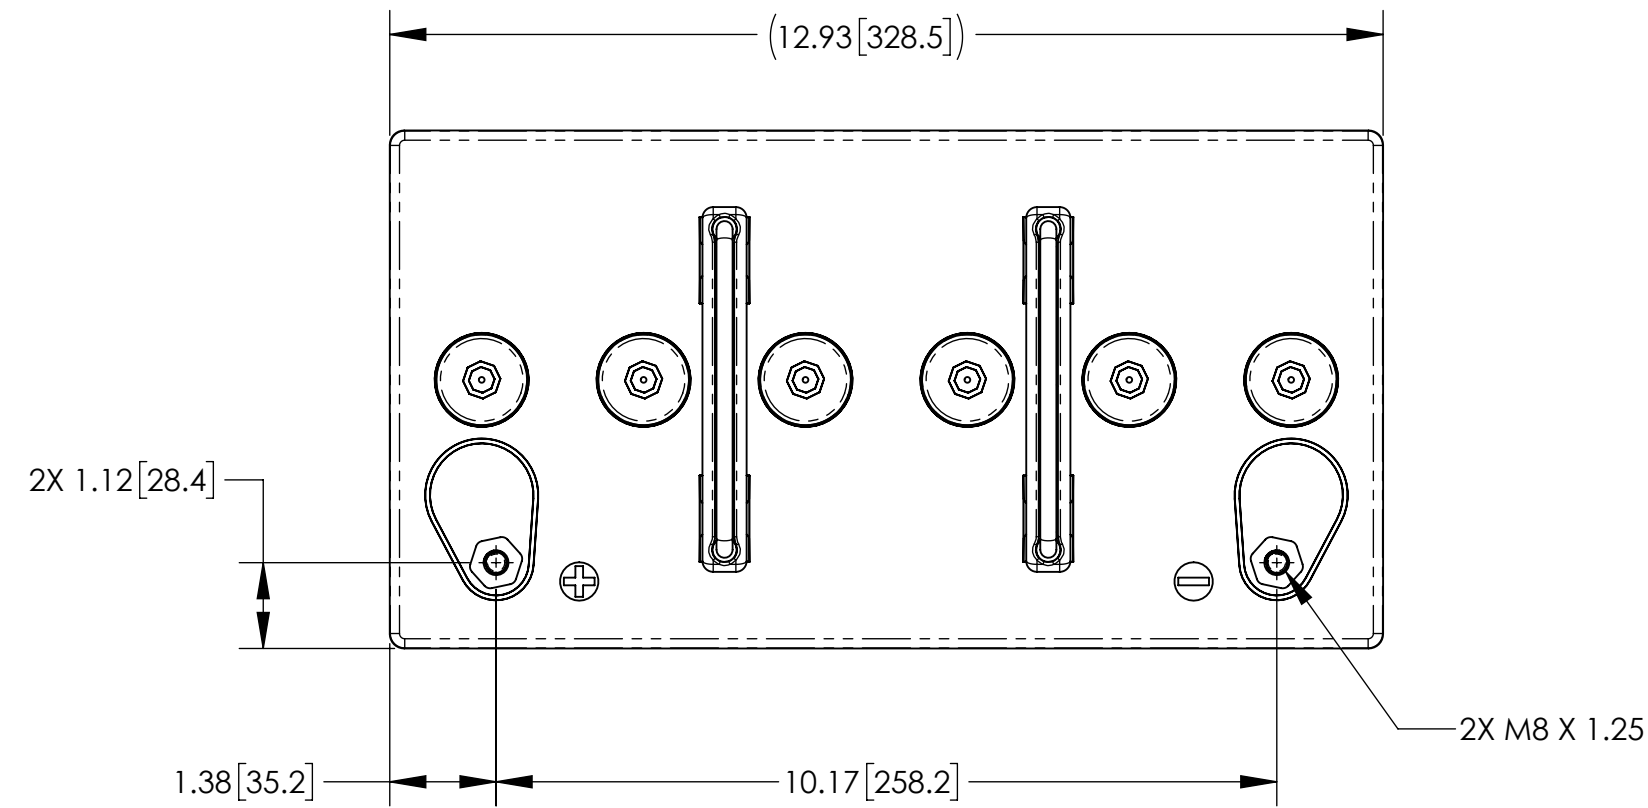

ISOMETRIC VIEW

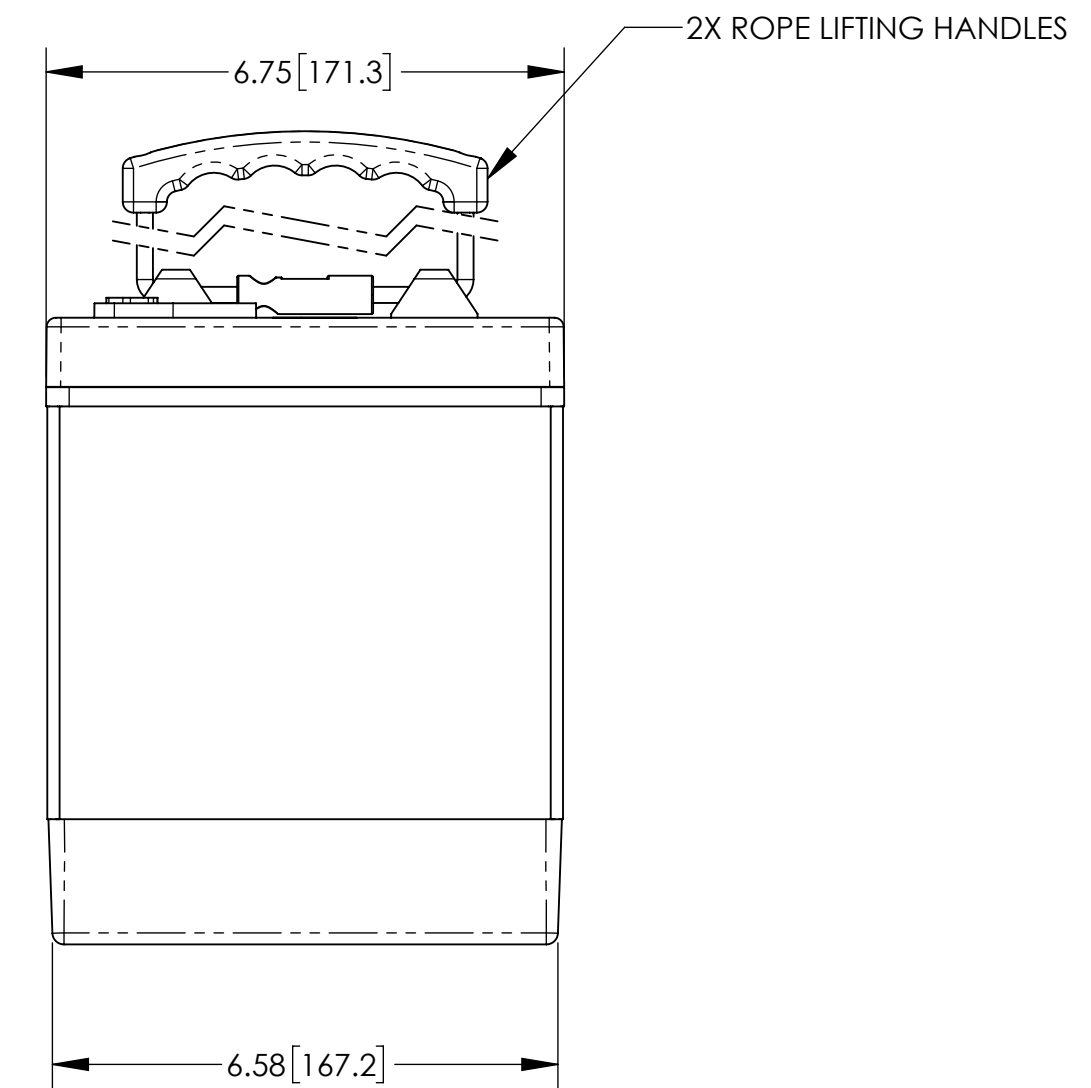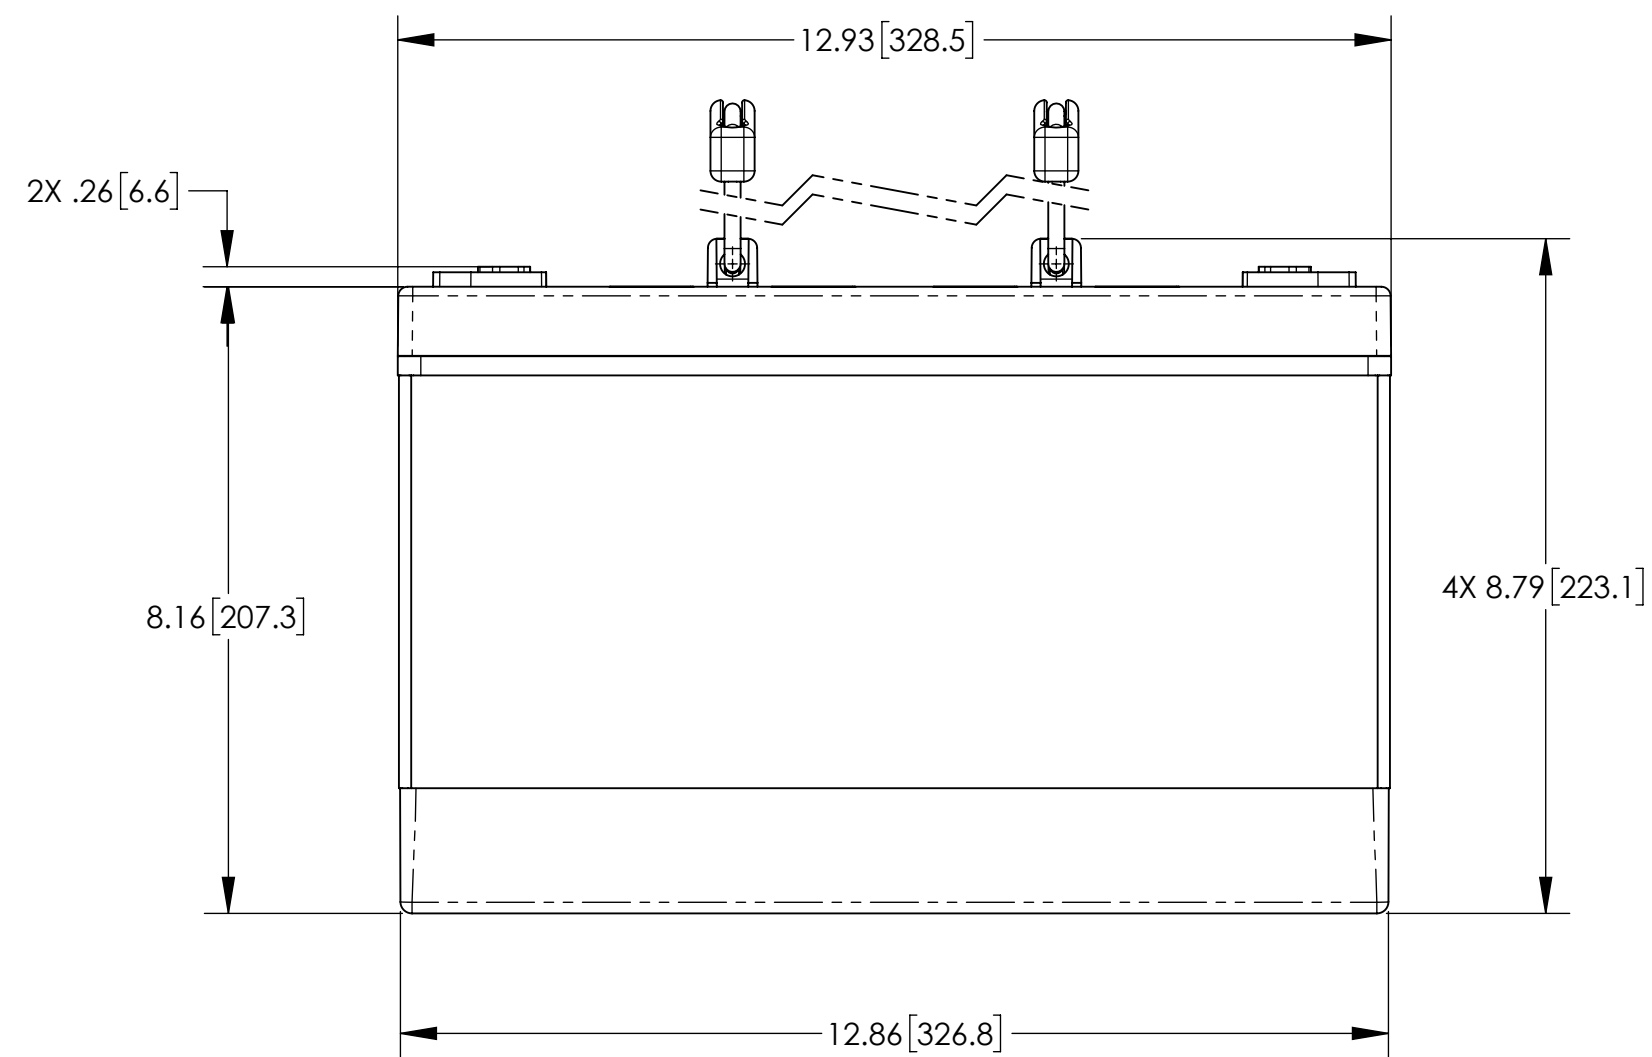

ENVELOPE DRAWING

CAPACITY RATINGS		
PART NUMBER	PVX-890T	PVX-1080T
NOMINAL WEIGHT	62 LBS [28.2 KG]	65 LBS [29.2 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77°F (25°C)	89 AH	108 AH

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:			CONTRACT NO.		CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790		
FRACTIONS	DECIMALS	ANGLES	APPROVALS		TITLE		
±1/32	.XX ± .12 .XXX ± .060	±1°	DRAWN	ELH	BATTERY, SLA, 12 VOLT, PVX-1080T SERIES		
TREATMENT	NONE		CHECKED	HRF	DATE	8/21/01	
FINISH	NONE		APPROVED	JBT	DATE	8/23/01	
SIMILAR TO	CALC WT		ISSUED	DH	DATE	7/30/20	
			SCALE	1:2.5	SHEET 1 OF 1		REV D