
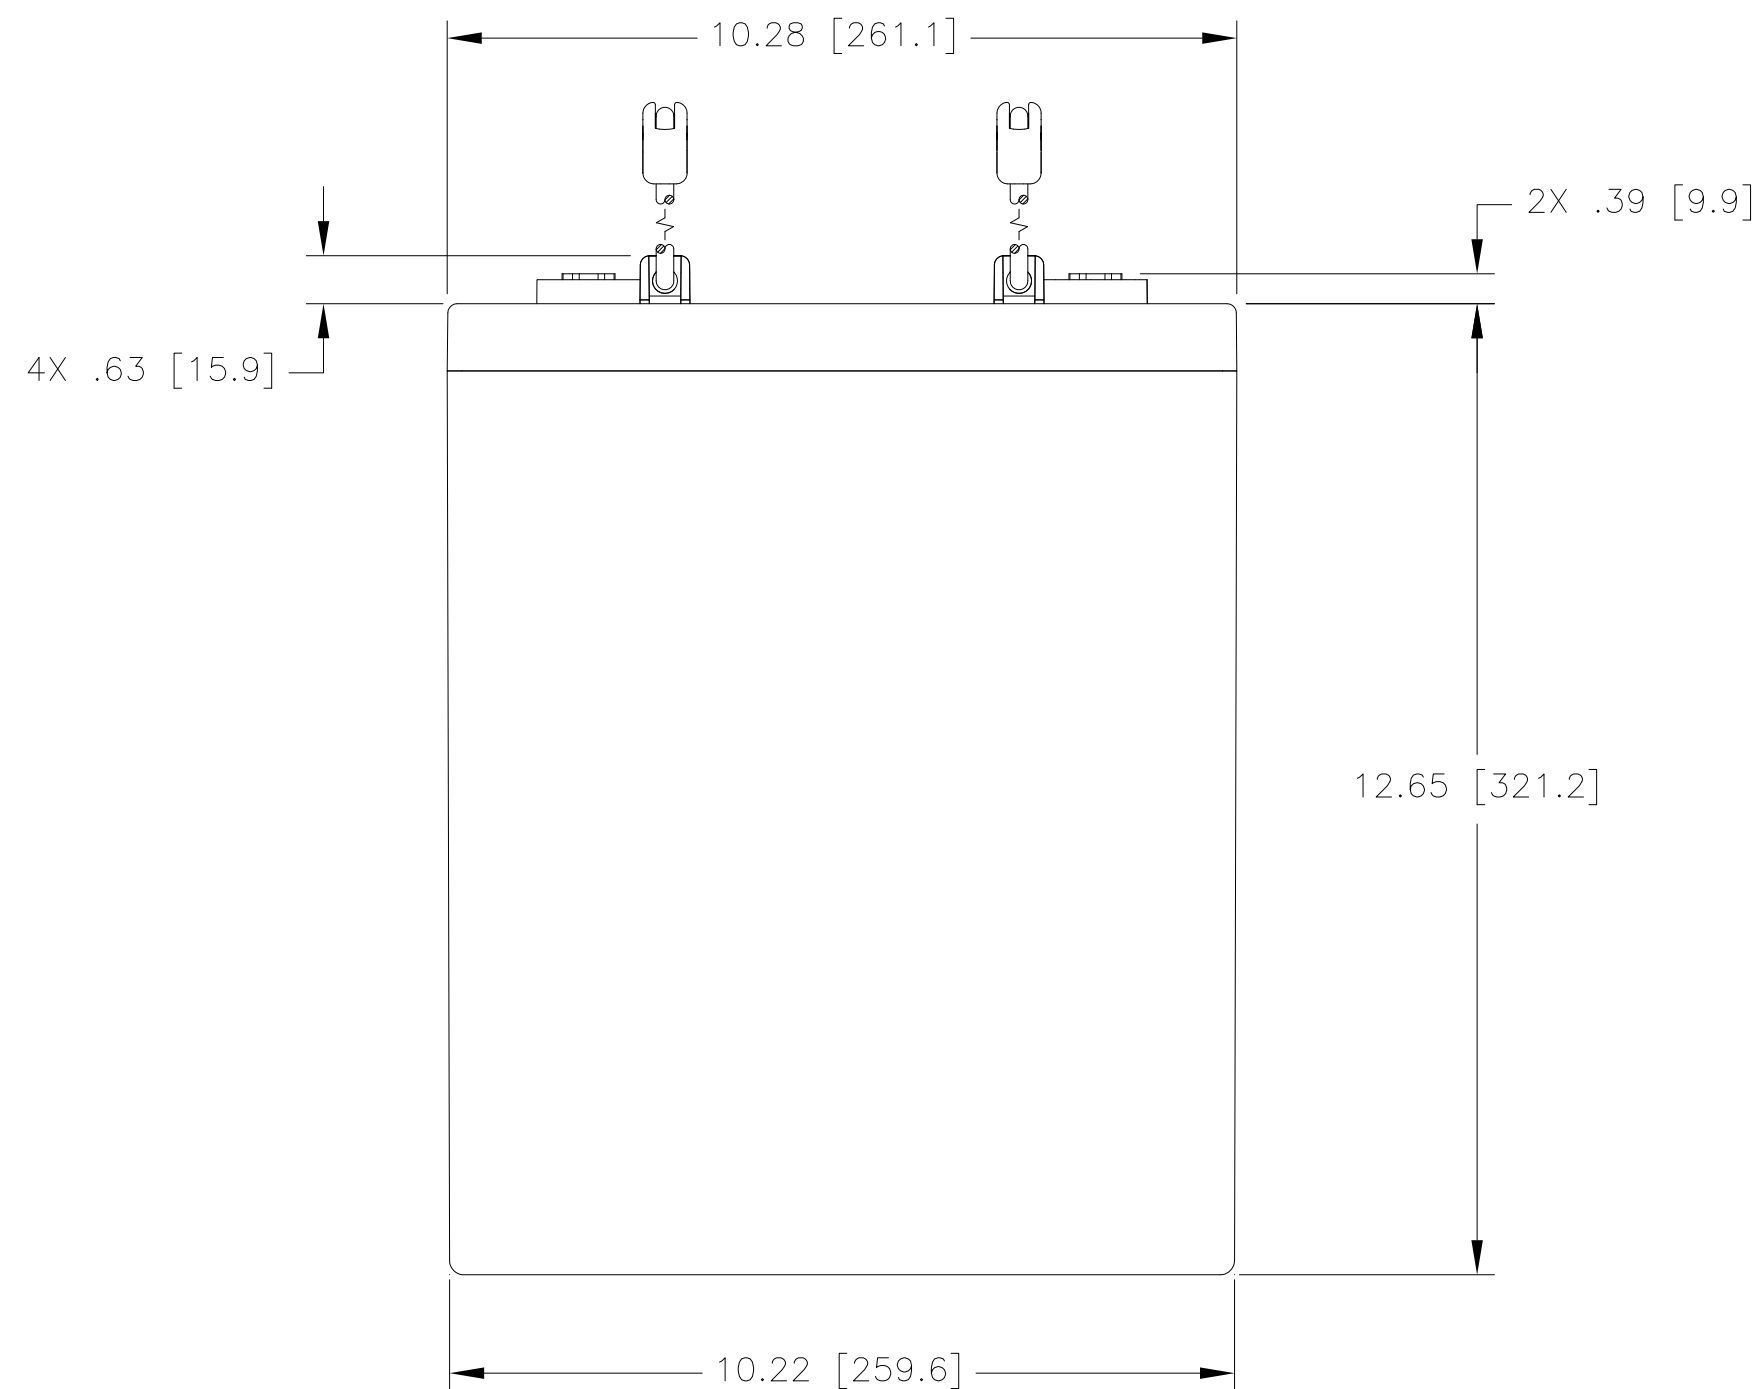
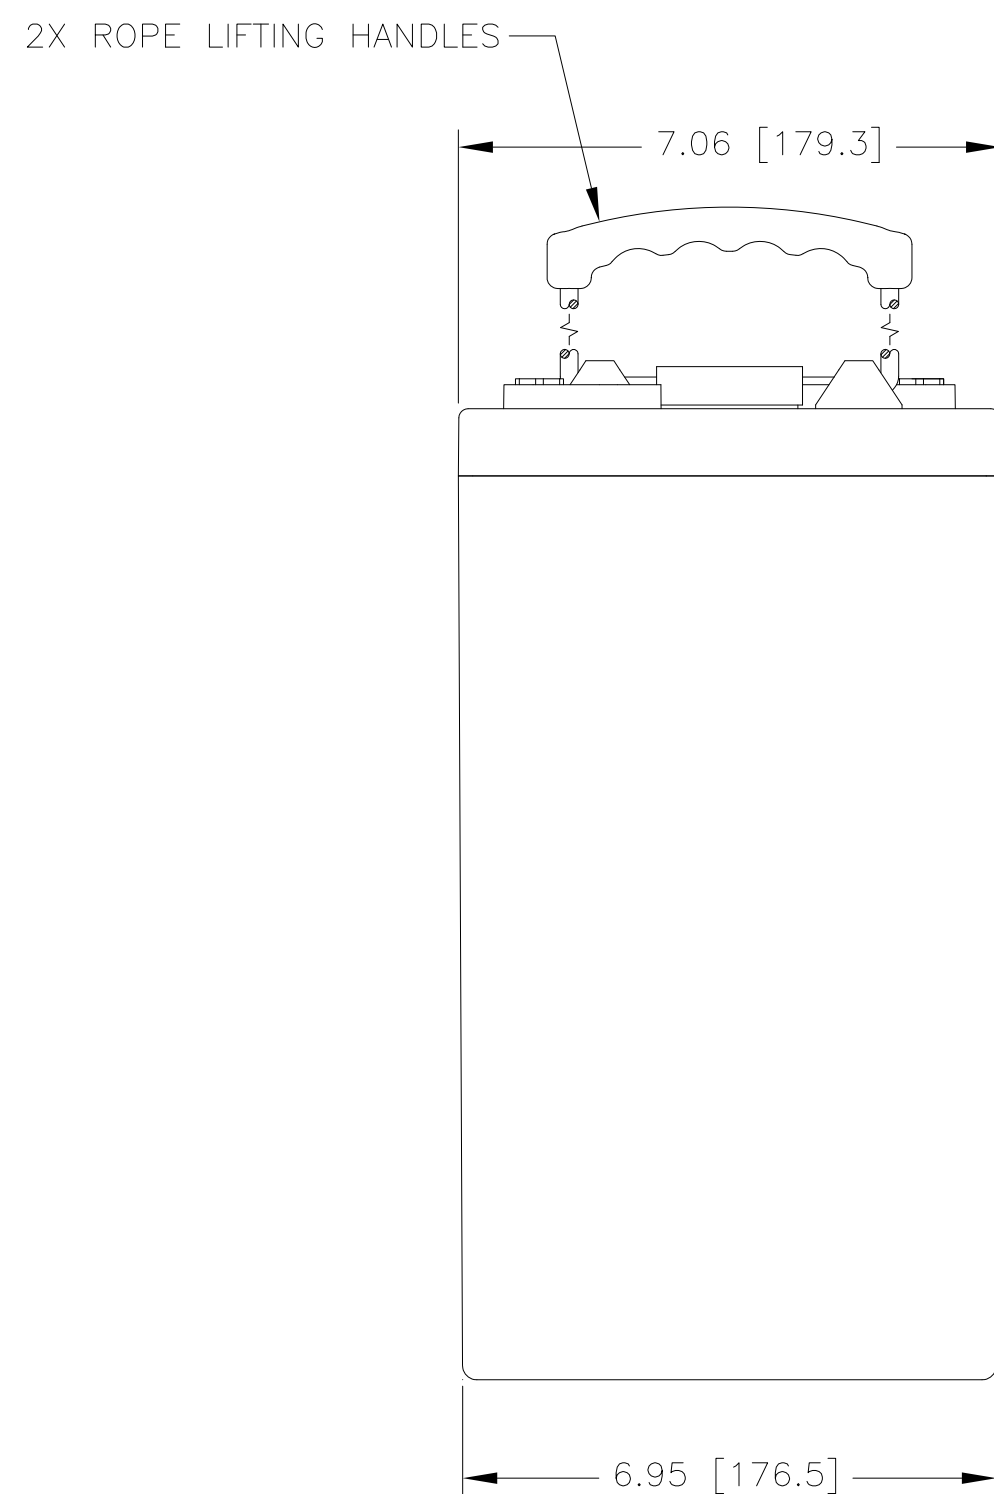


NOTES: UNLESS OTHERWISE SPECIFIED

- SEE DRAWING NO. CB-00288 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
- ALL TESTING IS PERFORMED IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
- DIMENSIONS ARE INCH [MILLIMETER].
- ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).
- TERMINAL HARWARE KIT PROVIDED, PART NUMBER 6923.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	CHANGED HANDLE DIRECTION	2/26/07	JBT
B	CHANGED COVER & HANDLE, NOM. WT. 91 lbs WAS 82 lbs	11/6/07	JBT
C	REVISED TERMINAL DAMS, TERMINAL HEIGHT & HANDLES	9/16/09	JBT
D	REVISED TERMINAL HEIGHT	6/12/20	PH

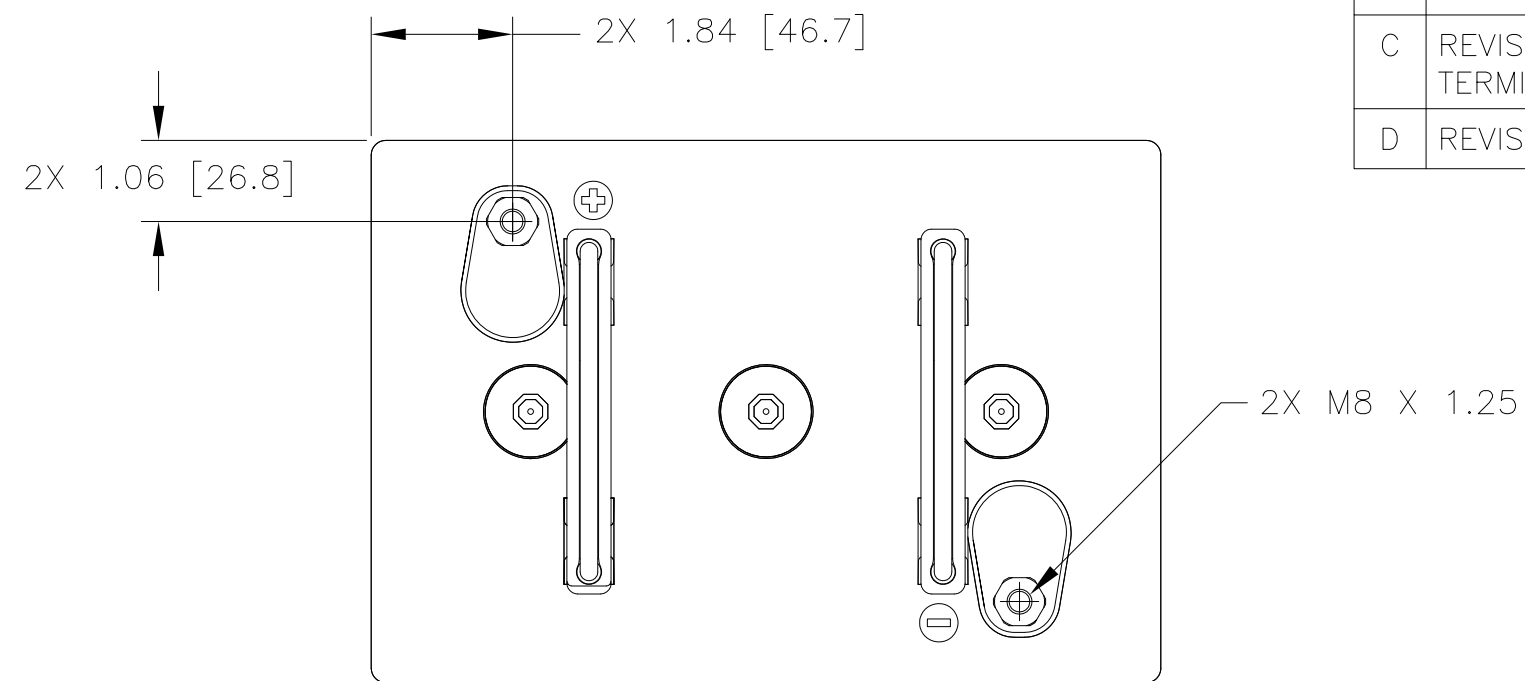

ENVELOPE DRAWING

CAPACITY RATINGS	
PART NUMBER	PVX-3050T
NOMINAL WEIGHT	91 LBS [41.3 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77°F (25° C)	305 AH

QTY	RECD	CAGE CODE	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	ITEM NO.
PARTS LIST						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:				CONCORDE BATTERY CORPORATION 209 SAN BERNARDINO RD, W. COVINA, CA 91790		
FRACTIONS DECIMALS ANGLES ± 1/32 .XX ± .12 ± 1° .XXX ± .060				TITLE BATTERY, SLA, 6 VOLT, PVX-3050T		
TREATMENT		NONE		APPROVALS		DATE
FINISH		NONE		DRAWN RM		8/23/06
SIMILAR TO		ACT WT CALC WT		APPROVED JBT		12/20/06
				ISSUED DH		6/12/20
				SCALE 1=2.5		
				SHEET 1 OF 1		