
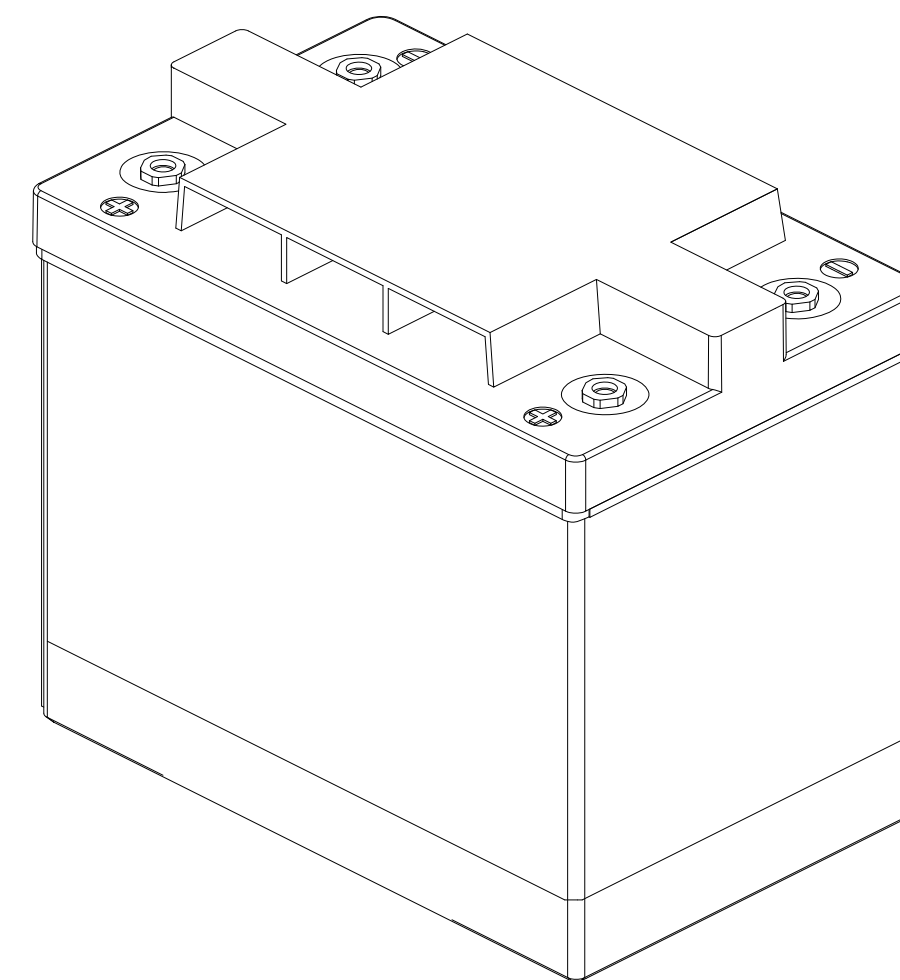



NOTES: UNLESS OTHERWISE SPECIFIED

1. SEE DRAWING NO. CB-00292 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
2. ALL TESTING IS PERFORMED IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
3. DIMENSIONS ARE INCH [MILLIMETER].
4. ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).
5. TERMINAL HARDWARE KIT PROVIDED, PART NUMBER 6923 (2 REQD).

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	STANDARDIZED ENVELOPE, ADDED NOTE 5	7/29/20	PH

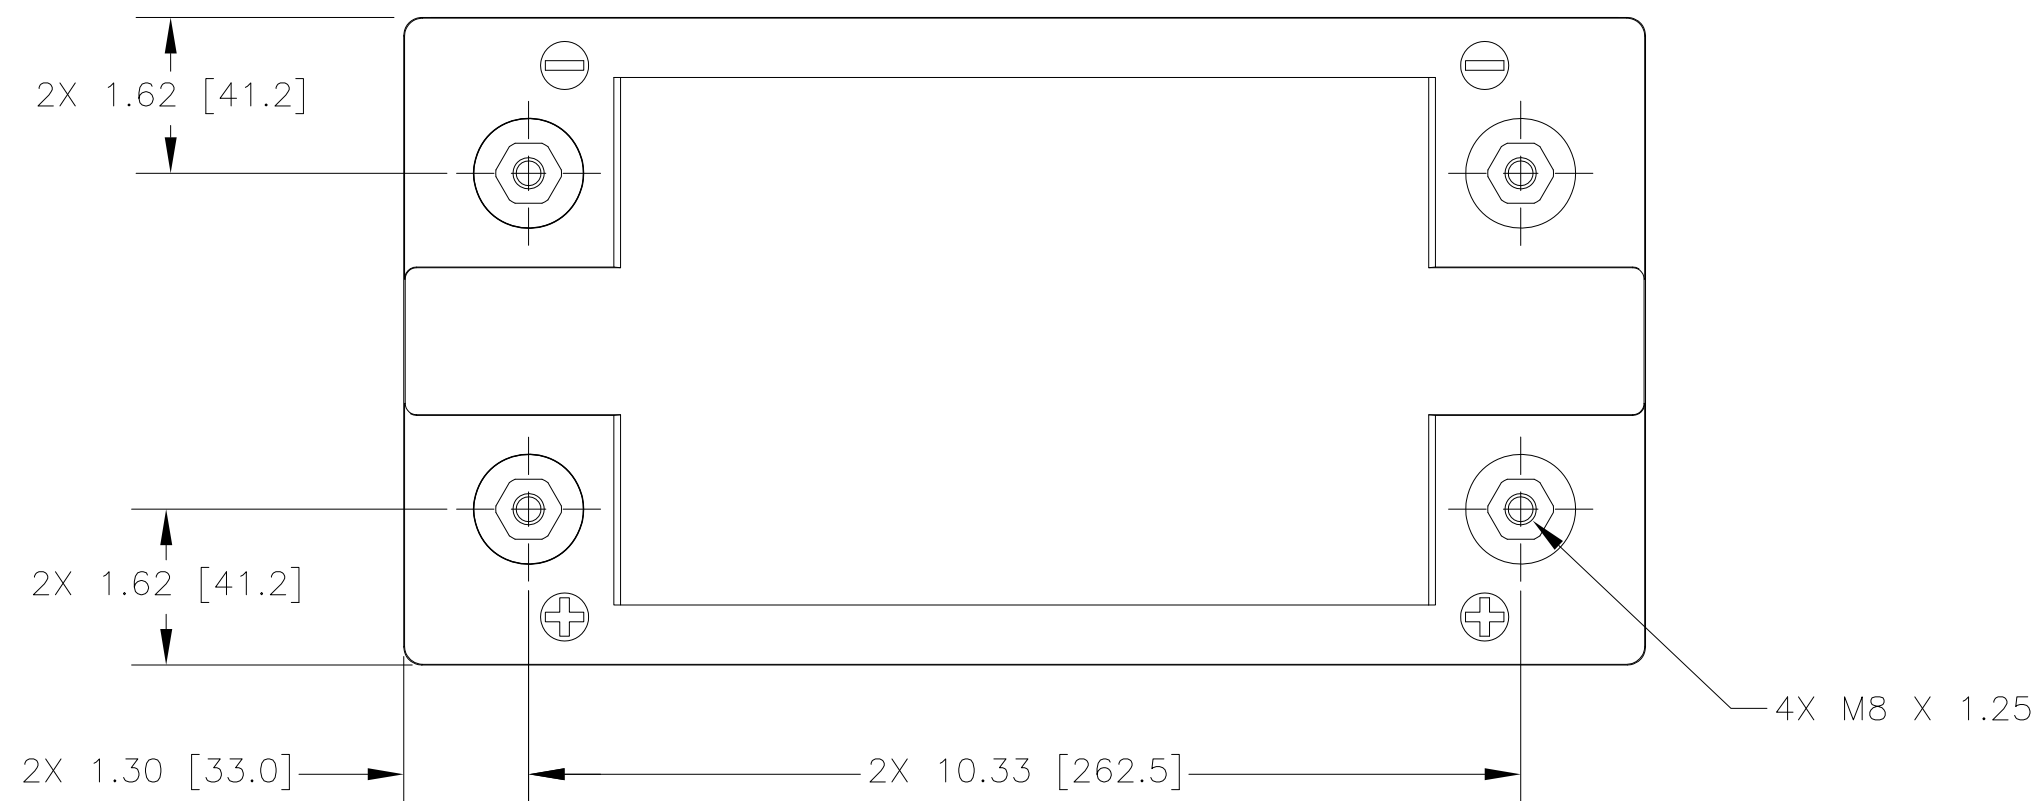

REFERENCE VIEW

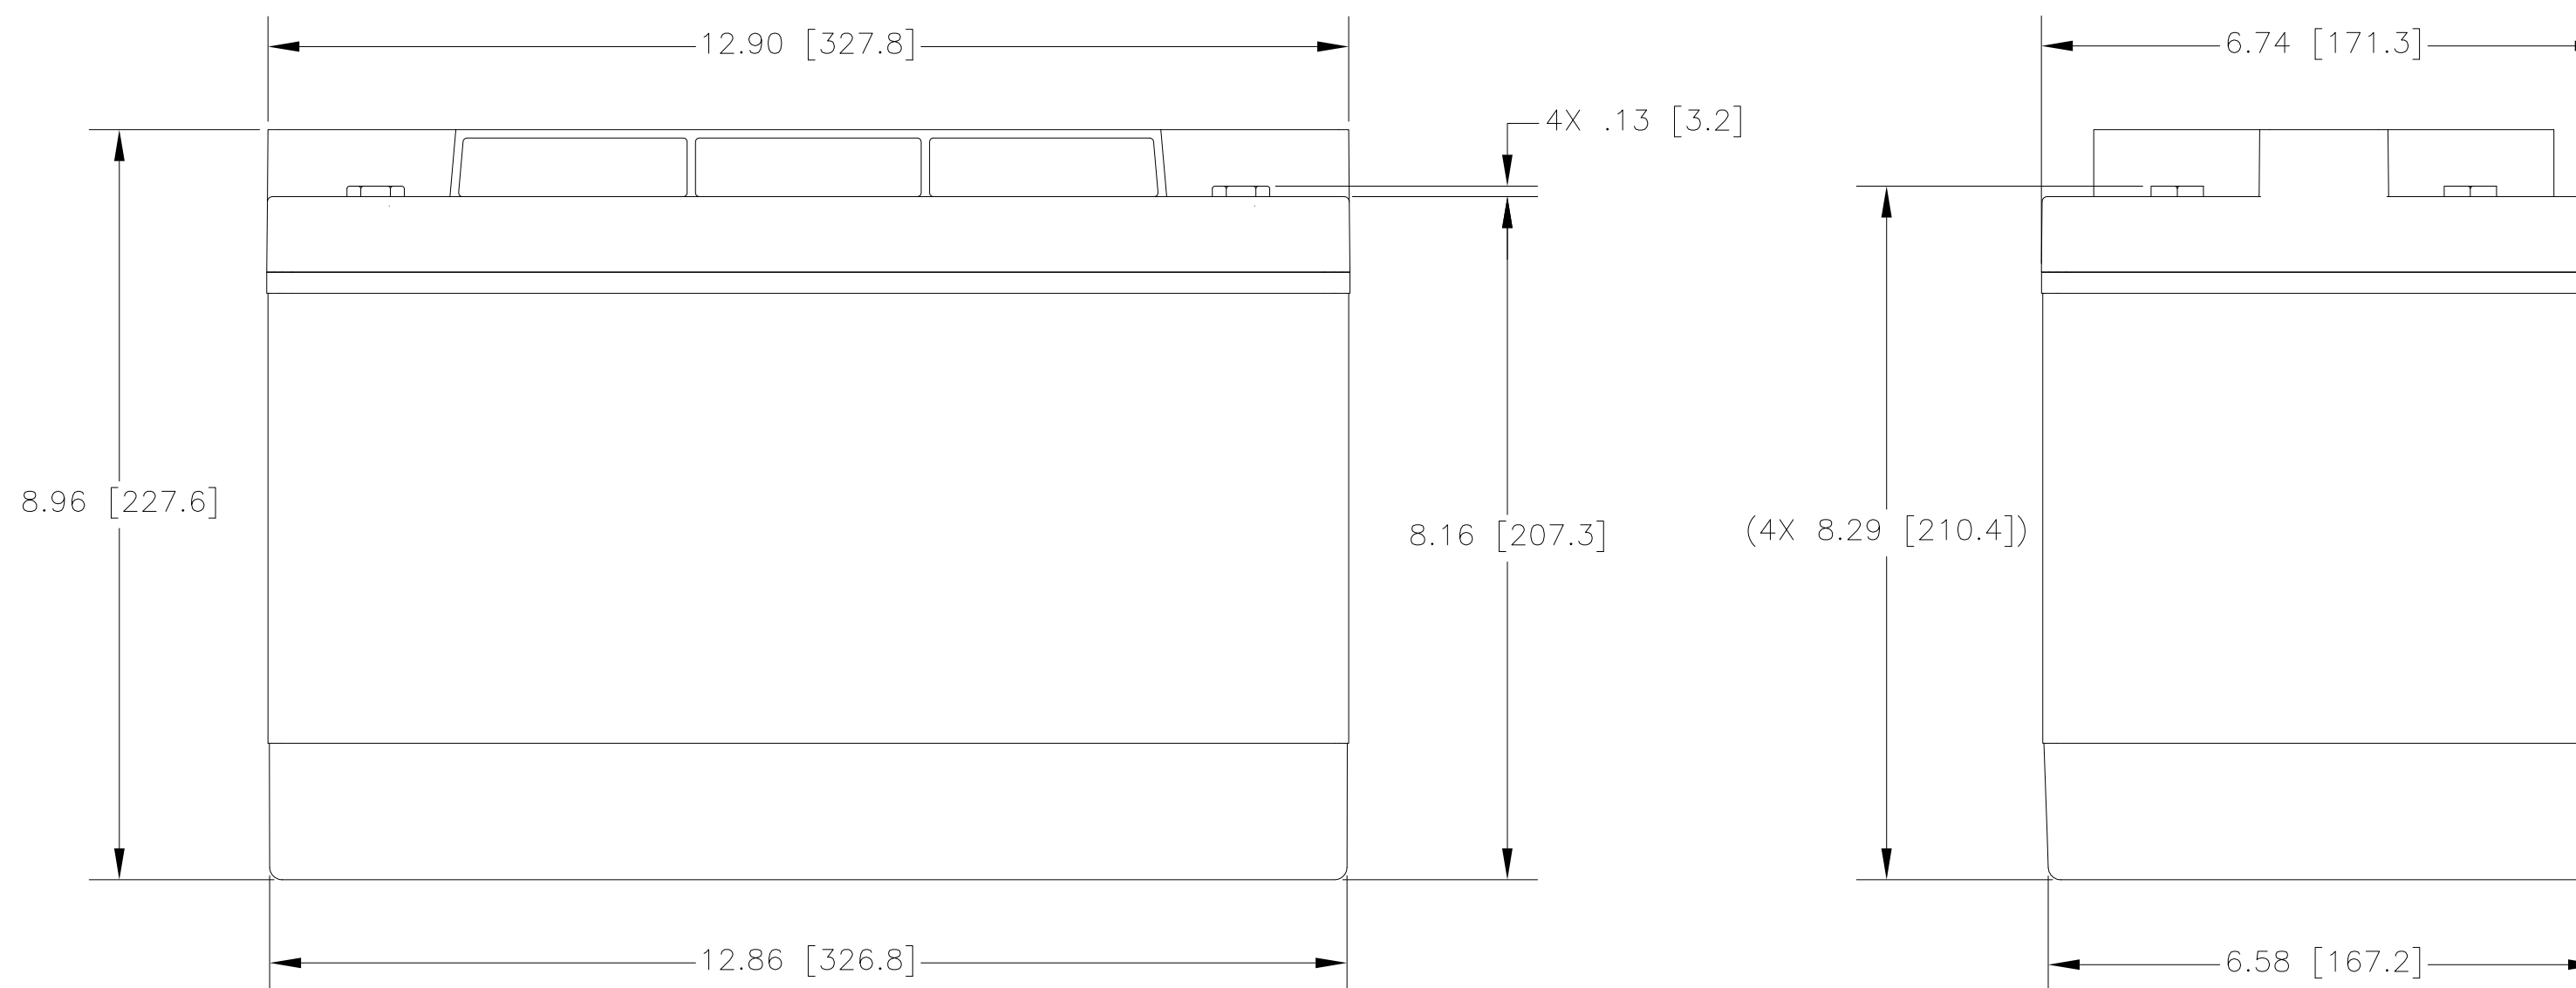

ENVELOPE DRAWING

CAPACITY RATINGS	
PART NUMBER	PVX-7680T
NOMINAL WEIGHT	75 LBS [34.0 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77°F (25°C)	768 AH

QTY REQD	CAGE CODE	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	ITEM NO.
PARTS LIST					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:			CONCORDE BATTERY CORPORATION		
FRACTIONS DECIMALS ANGLES			2009 SAN BERNARDINO RD, W. COVINA, CA 91790		
± 1/32 .XX ± .12 ± 1'			TITLE BATTERY, SLA, 2 VOLT, PVX-7680T		
.XXX ± .060			SIZE CAGE CODE DWG NO. REV		
TREATMENT	NONE	CHECKED	AMIII	5/16/11	C 63017 PVX-7680T A
FINISH	NONE	APPROVED	DV	5/17/11	
SIMILAR TO	ACT WT	CALC WT	ISSUED	DH	7/30/20
SCALE NONE				SHEET 1 OF 1	