
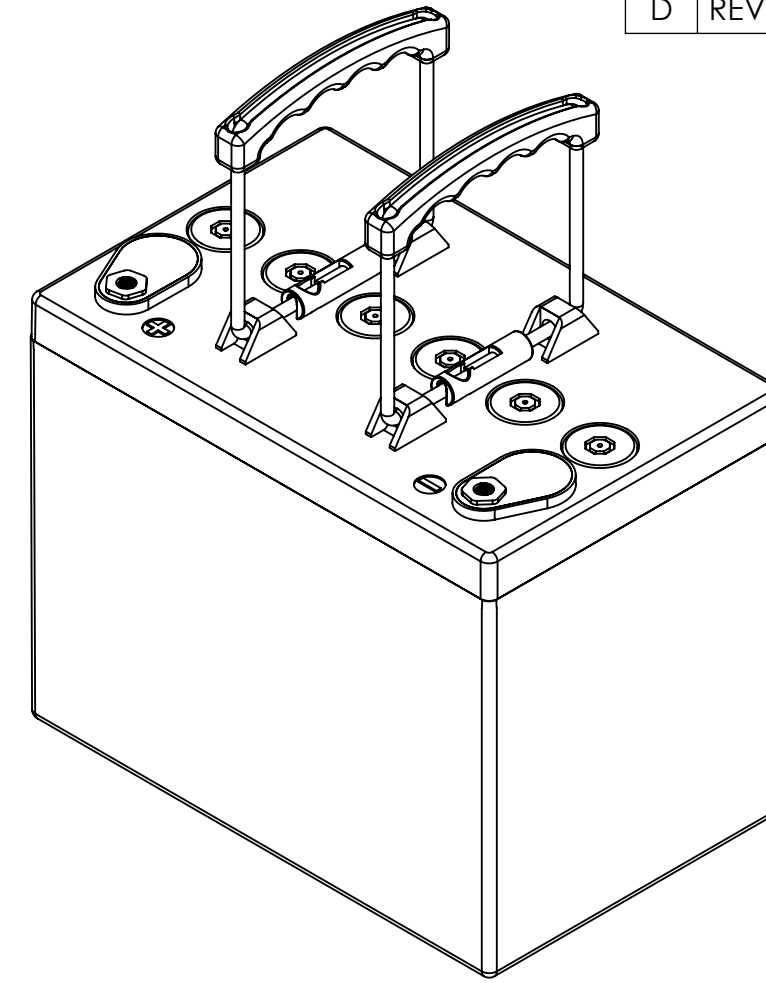




NOTES: UNLESS OTHERWISE SPECIFIED

1. SEE DRAWING NO. CB-00278 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
2. ALL TESTING IS PERFORMED IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
3. DIMENSIONS ARE INCH [MILLIMETER].
4. ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).
5. TERMINAL HARDWARE KIT PROVIDED, PART NUMBER 6923.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED NOTE 1	8/29/16	PH
B	REDESIGNED COVER	6/26/18	PH
C	STANDARDIZED ENVELOPE, ADDED NOTE 5	7/28/20	PH
D	REVISED CONTAINER	11/10/21	PH

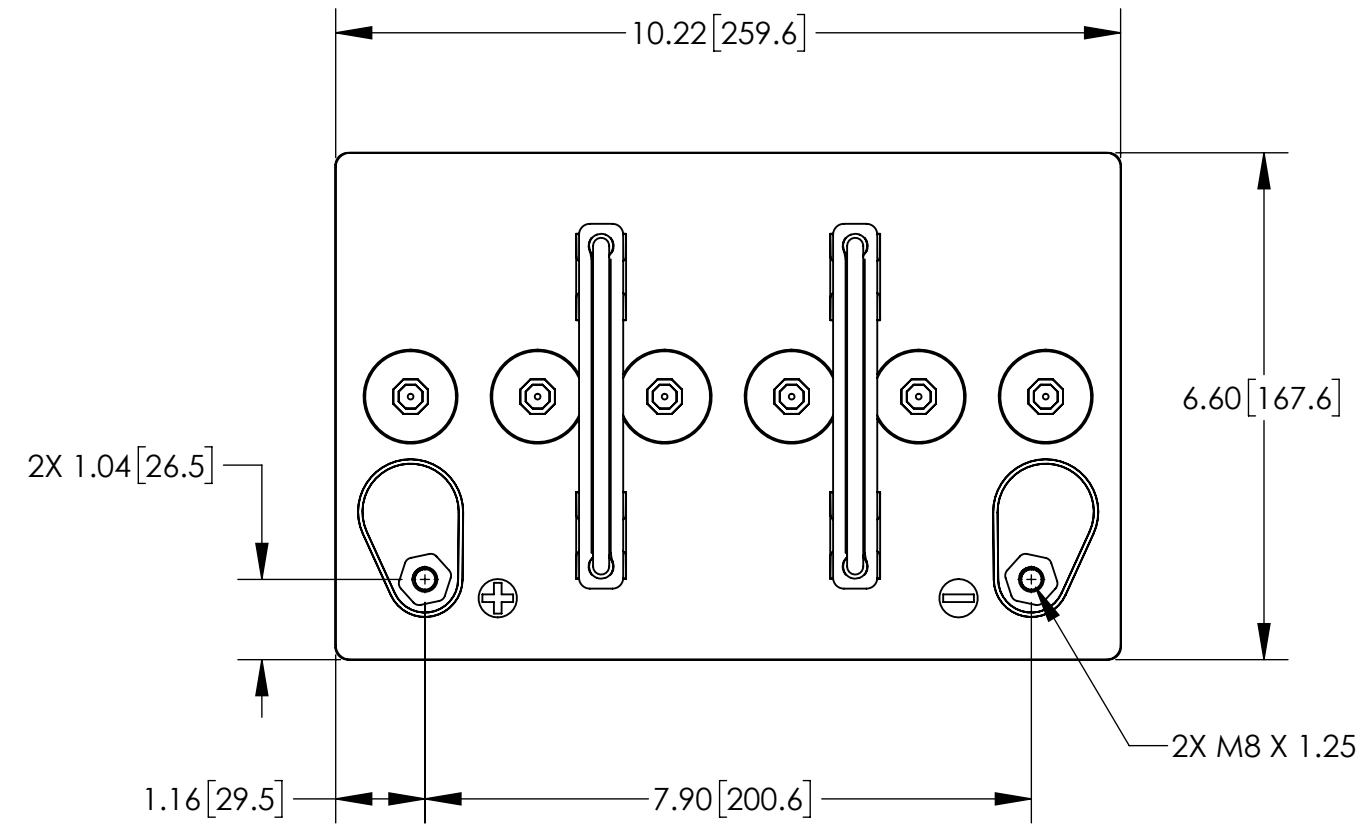

ISOMETRIC VIEW

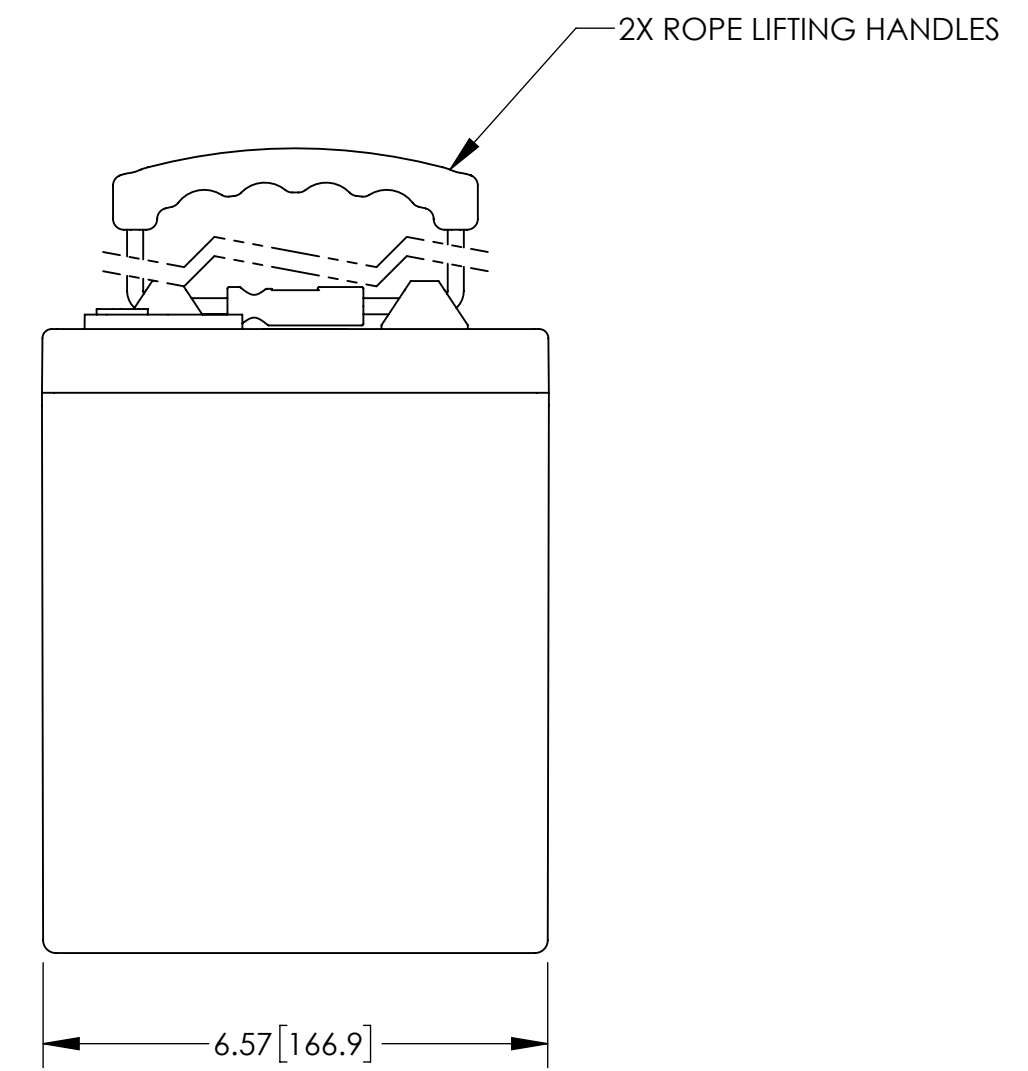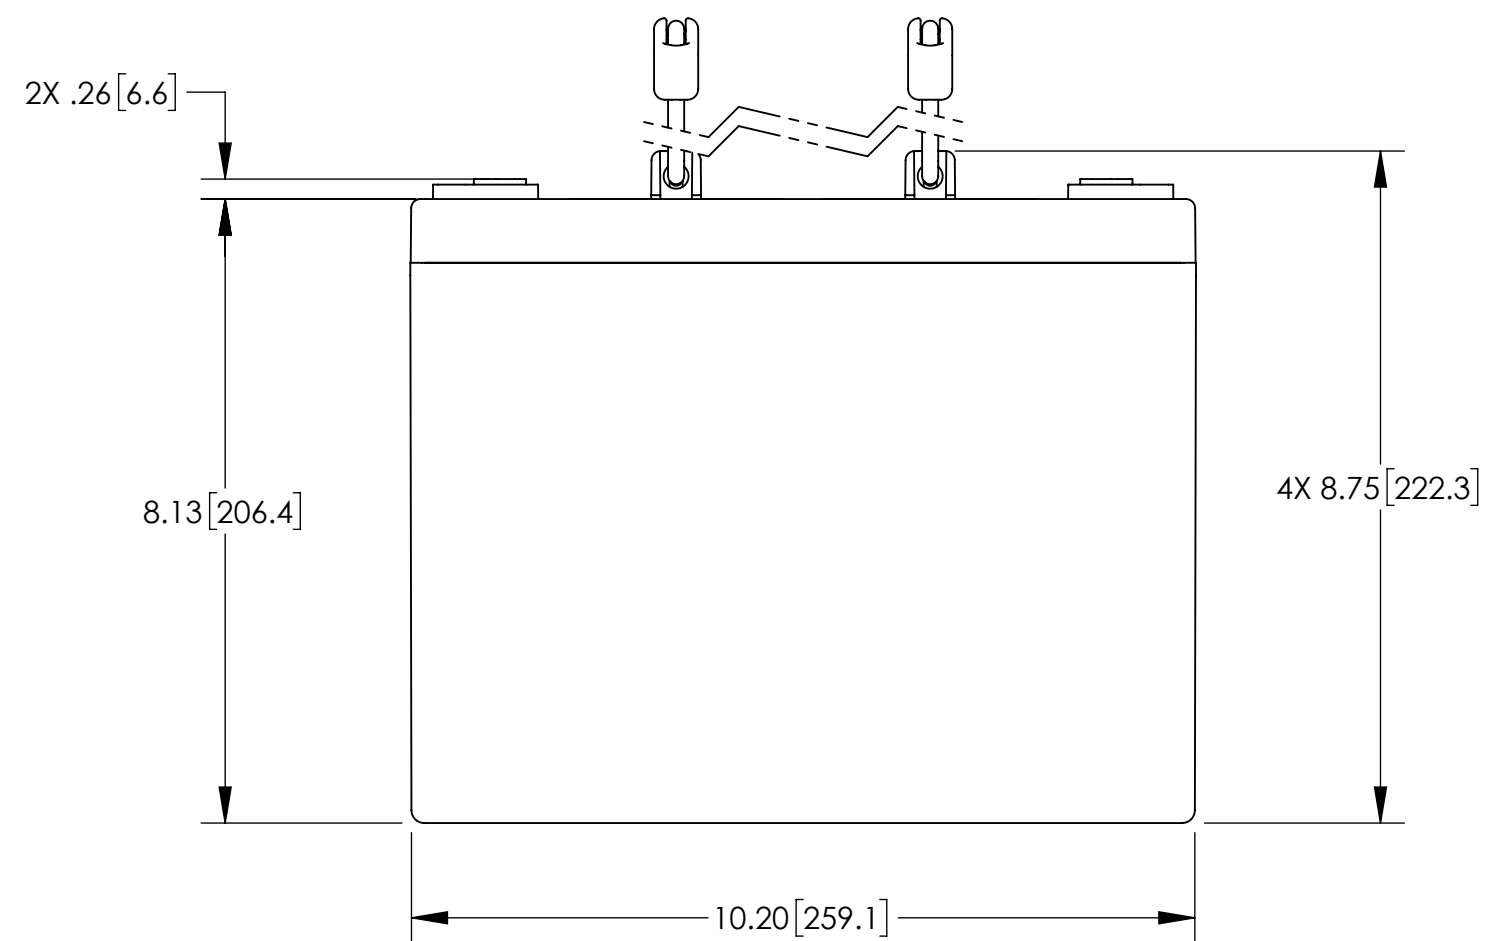

ENVELOPE DRAWING

CAPACITY RATINGS		
PART NUMBER	PVX-690T	PVX-840T
NOMINAL WEIGHT	51 LBS [23.2 KG]	57 LBS [25.9 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77°F (25°C)	69 AH	84 AH

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:			CONTRACT NO.		CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790			
FRACTIONS	DECIMALS	ANGLES	APPROVALS		DATE		TITLE	
±1/32	.XX ± .12 .XXX ± .060	±1°	DRAWN ELH		8/13/01		BATTERY, SLA, 12 VOLT, PVX-840T SERIES	
TREATMENT	NONE		CHECKED HRF		8/21/01		SIZE	REV
FINISH	NONE		APPROVED JBT		8/23/01		CAGE CODE	D
SIMILAR TO	CALC WT		ISSUED DH		11/17/21		DWG NO.	
							SCALE	1:2.5
							SHEET 1 OF 1	