



NOTES: UNLESS OTHERWISE SPECIFIED

1. SEE DRAWING NO. CB-00281 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
2. ALL TESTING IS PERFORMED IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
3. DIMENSIONS ARE INCH [MILLIMETER].
4. ABBREVIATION USED IN TITLE IS: SEALED LEAD ACID (SLA).
5. TERMINAL HARDWARE KIT PROVIDED, PART NUMBER 6923 (2 REQD).

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	CHANGED HANDLE DIRECTION	2/26/07	JBT
B	CHANGED COVER & HANDLE, NOM. WT. 94 lbs WAS 85 lbs	11/6/07	JBT
C	REVISED TERMINAL DAMS, TERMINAL HEIGHT & HANDLES	9/16/09	JBT
D	REVISED TERMINAL HEIGHT	6/12/20	PH

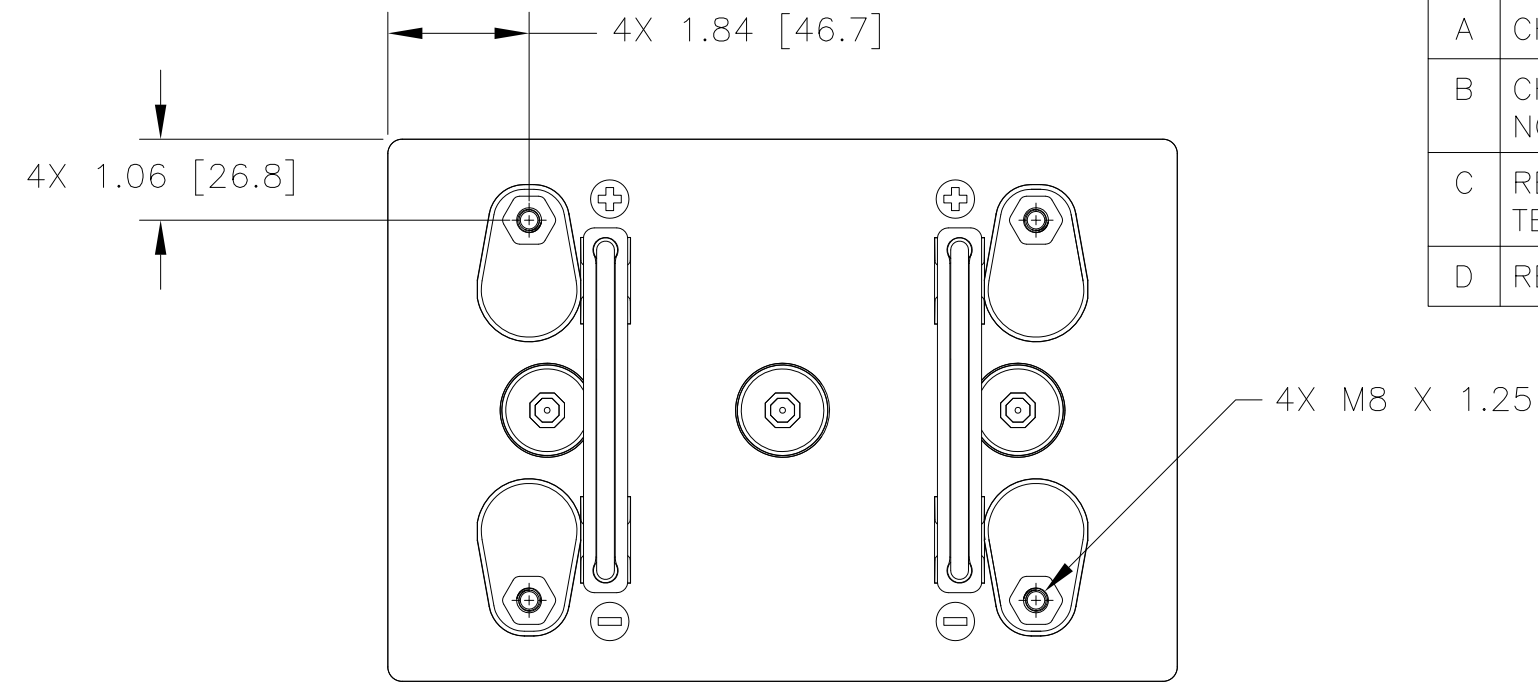

2X ROPE LIFTING HANDLES

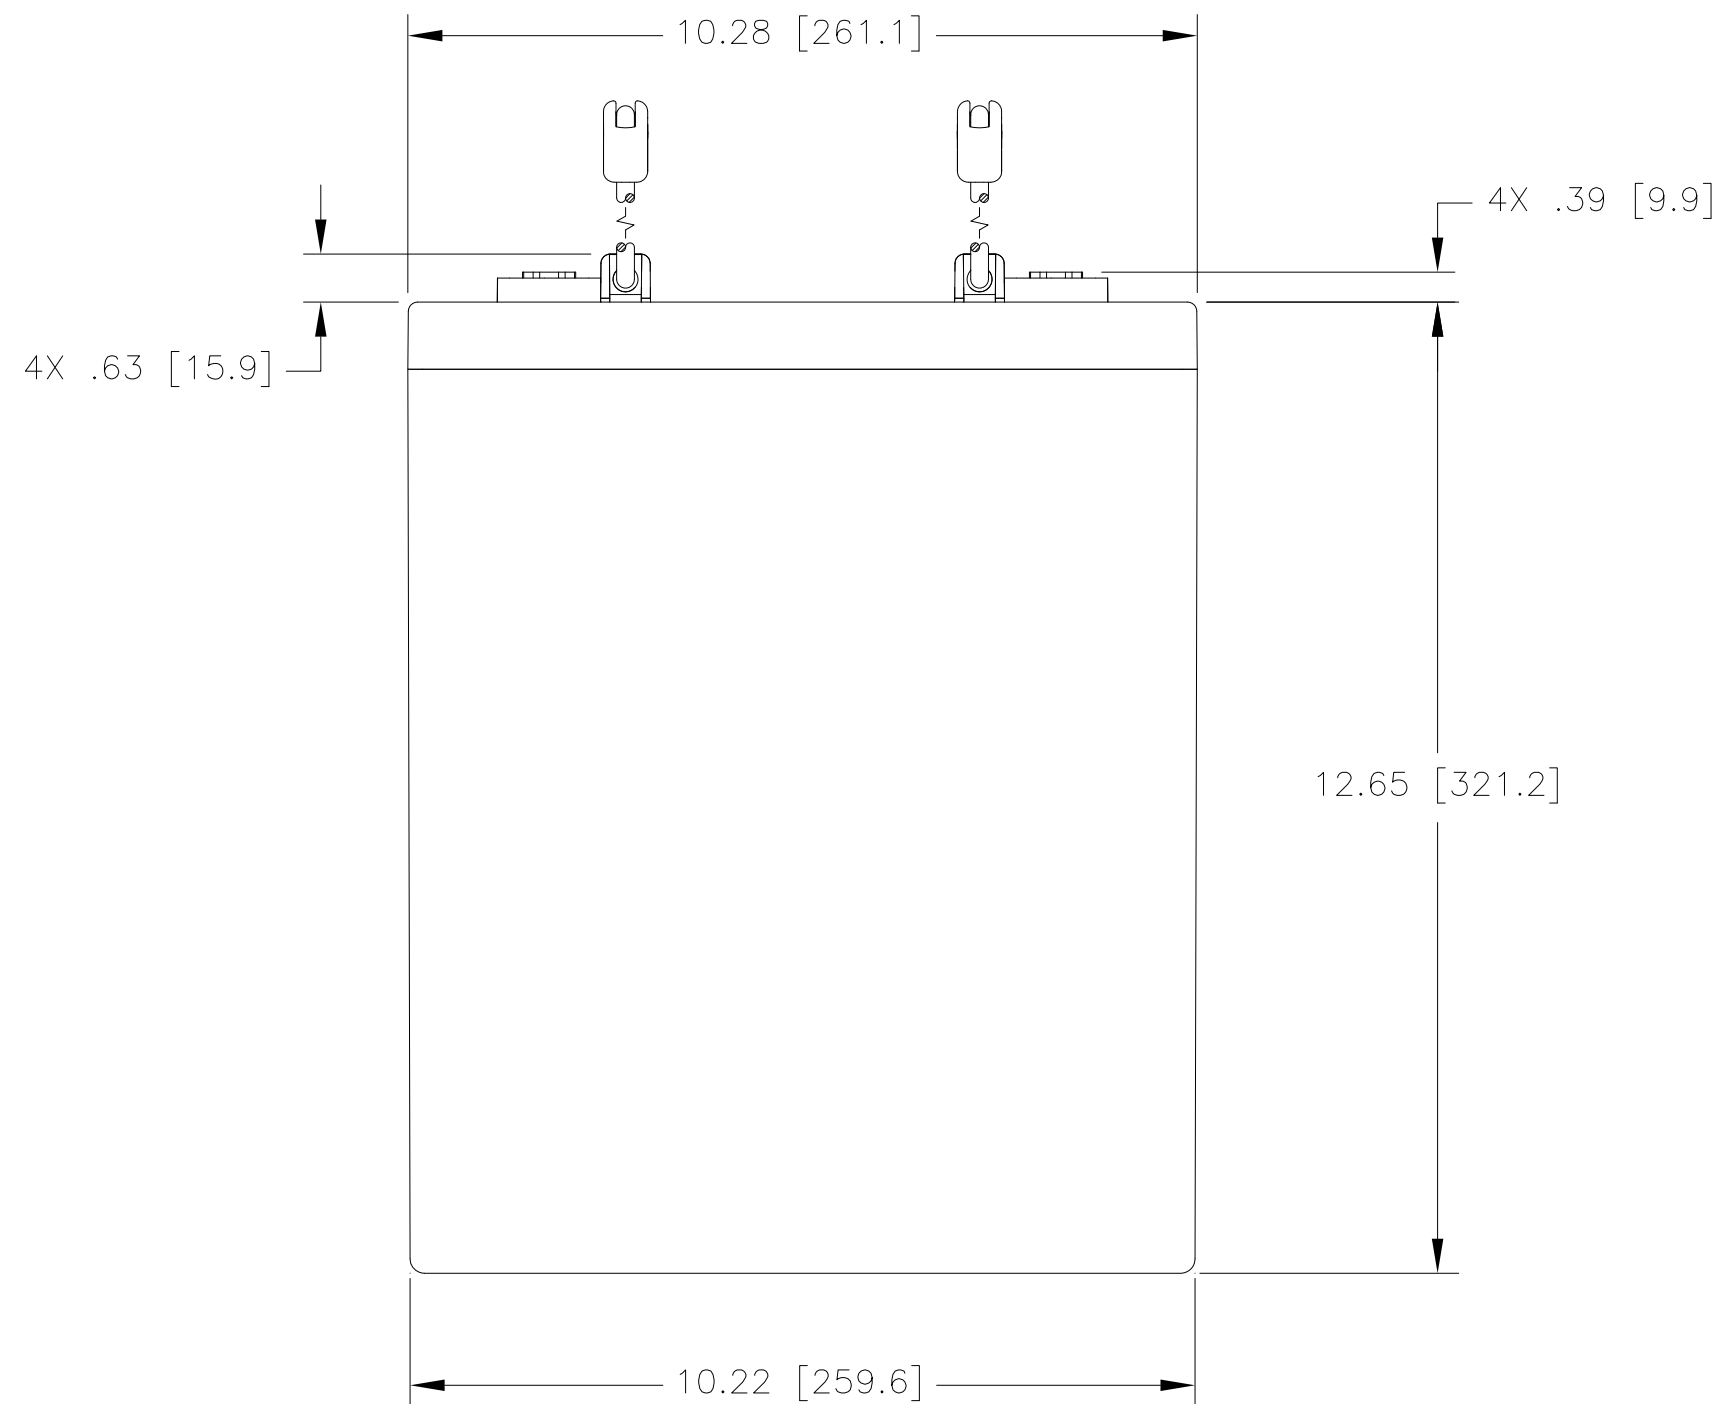

ENVELOPE DRAWING

CAPACITY RATINGS	
PART NUMBER	PVX-9150T
NOMINAL WEIGHT	94 LBS [42.6 KG]
AMPERE HOUR CAPACITY @ 24 HOUR 1.75 VOLTS/CELL @ 77°F (25° C)	915 AH

QTY REQD	CAGE CODE	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	ITEM NO.
PARTS LIST					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:			CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790		
FRACTIONS DECIMALS ANGLES ± 1/32 .XX ± .12 ± 1° .XXX ± .060			TITLE BATTERY, SLA, 2 VOLT, PVX-9150T		
TREATMENT NONE			APPROVALS	DATE	
FINISH NONE			DRAWN D. AYALA	12/15/06	
SIMILAR TO			CHECKED AMIII	1/5/07	
ACT WT			APPROVED JBT	1/8/07	
CALC WT			ISSUED DH	6/12/20	
			SCALE 1=2.5	DWG NO. PVX-9150T	REV D
			SHEET 1 OF 1		